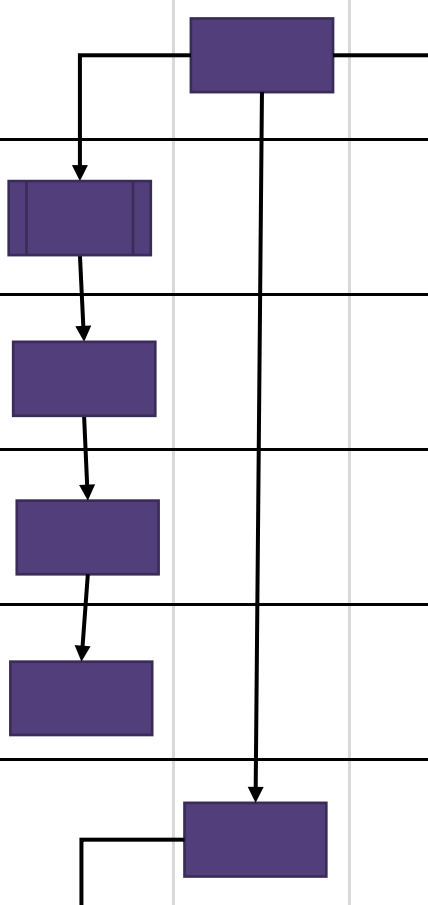












Process Flow Chart Plant Management (15)

033T
(April 2025)

Task	Process	Resource	Links
Plant and equipment register is developed		 050F/ 031G	Plant and Equipment Register (050F) Plant and Equipment Register Guideline (031G)
Pre-purchase assessment conducted for new plant		 046F	Pre-purchase Checklist (046F)
Plant that is deemed suitable and purchased must have a risk assessment completed		 081F	Plant Risk Assessment (081F)
Plant is installed and commissioned			
Standard operating procedures are developed and displayed with the plant		 066F/ 011T	Standard Operating Procedure Template (066F) Pictogram Images (011T)
Preventative maintenance plan implemented			

Develop a lock out/tag out process for plant	 		 		Lock Out/Tag Out Guidelines (016G)
Plant that is disposed of, dismantled or decommissioned has relevant documentation forwarded to the recipient and is removed from worksite registers					Plant and Equipment Register (050F) Equipment Disposal/Write-off Form (082F)